


MILOS

S-MR20 Steel roof

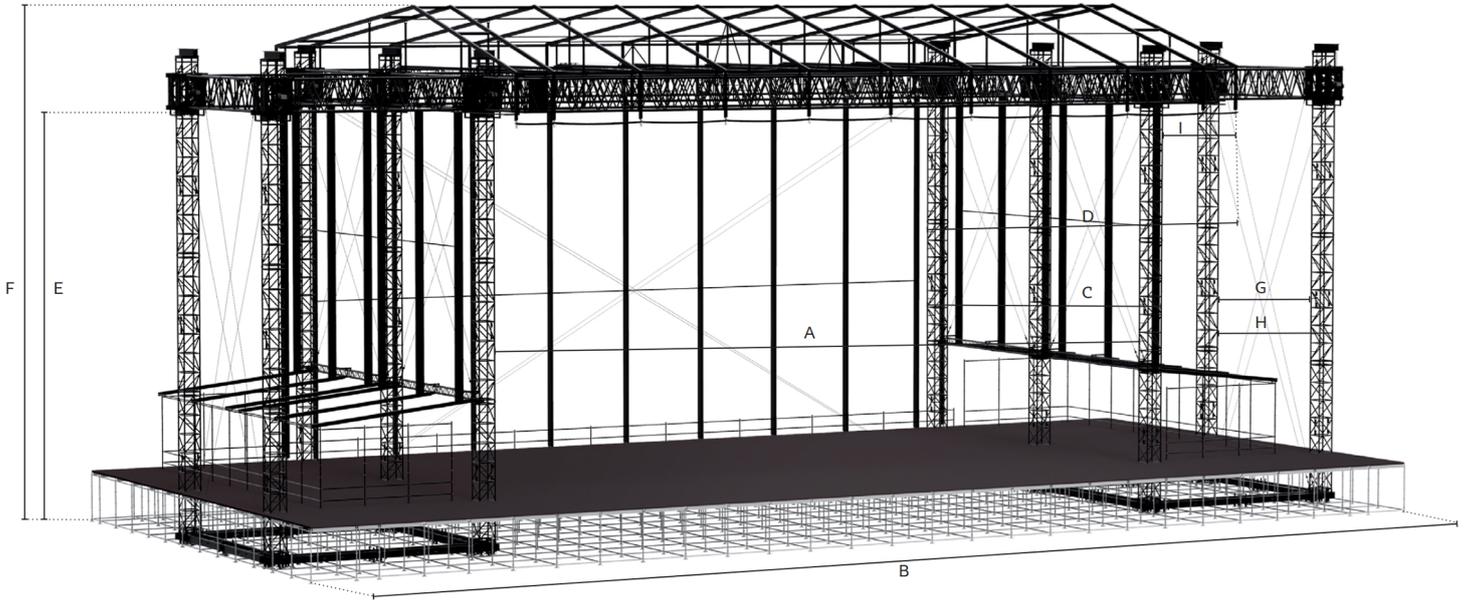

Technical specifications

		Size >	32×25 m	(104.98×82.02 ft)
Dimensions	A	Internal width	32.70 m	(107.28 ft)
	B	Overall external width	54.10 m	(177.49 ft)
	C	Depth	20.00 m	(65.61 ft)
	D	Overall external depth	25.55 m	(83.83 ft)
	E	Clearance	18.40 m	(60.36 ft)
	F	Overall height	23.30 m	(76.44 ft)
	G	PA wing – internal width	8.72 m	(28.61 ft)
	H	PA wing – overall external width	9.50 m	(31.17 ft)
	I	Cantilever depth	4.50 m	(14.76 ft)

Loading capacity

		Size >	32×25 m	(104.98×82.02 ft)
Loading capacity	Main grid	(UDL kg/lbs)	60000 kg	(132273 lbs)
		Side wings and PA in total	28000 kg	(61728 lbs)
* See structural report for exact load positioning				

Discover more
with the QR code



Milos

Špindlerova 286
413 01 Roudnice nad Labem
Czech Republic

Tel + 420 416 810 800
info@milos.cz
www.milosystems.com



MILOS

S-MR20 Steel roof



Out in the Green Festival, Switzerland



- Built to withstand the toughest conditions, ensuring safety and durability.
- Covering stage of 32x25 meters, it provides ample roofing for large gatherings.
- Our unique locking system supports up to 45 tons per tower, guaranteeing stability.
- Each tower comes with an integrated ladder, making climbing and maintenance a breeze.
- Features interconnecting towers for a seamless setup and multiple attachment points for steel wires.

For more information
about the project



use the QR code



Milos

Špindlerova 286
413 01 Roudnice nad Labem
Czech Republic

Tel + 420 416 810 800
info@milos.cz
www.milosystems.com

