

CELL500

- Low profile series designed for 48-51mm (1 7/8"-2") diameter tubes
- Ideal for exhibitions, displays & light duty applications
- Precision extruded ultra-high tensile aluminium alloy
- DGUV17/BGV C1 rating
- Compatible with M290 / M390 / M400 / M520 / M760 / 4GS-35 / 4GS-50 / 4GS-62

- Supplied with M6 bolt & wingnut
- Mounting hole for up to 10.5mm (5/12") bolts
- Polished surface with micro-percussion markings
- Powder coated versions available on request
- Rated with SF 8:1 (kg) DGUV17/BGV C1 (SWL1)
- Rated with SF 4:1 (kg) 2006/42/EC (SWL2)



CELL501

Basic clamp

kg	lbs	SWL1	SWL2	Weight	Tube Ø
		230 (507)	460 (1014)	0.14 (0.30)	48-51 mm (1.89"-2")

Basic clamp can be used for lightweight applications.




CELL502

Clamp with bolt and wingnut

kg	lbs	SWL1	SWL2	Weight	Tube Ø
		230 (507)	460 (1014)	0.22 (0.47)	48-51 mm (1.89"-2")

Clamp supplied with M10 x 30 bolt and wingnut.

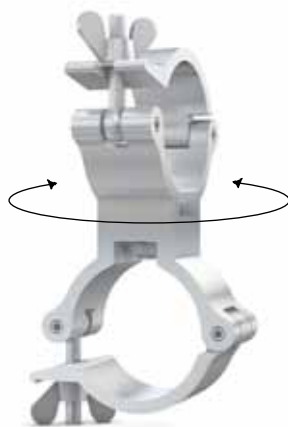


CELL504

Swivel coupler

kg	lbs	SWL1	SWL2	Weight	Tube Ø
		230 (507)	460 (1014)	0.27 (0.60)	48-51 mm (1.89"-2")

Set of two clamps free to rotate 360° for connection of two tubes.



CELL511

Panel holder

kg	lbs	SWL	Weight	Tube Ø
		55 (121)	0.22 (0.47)	48-51 mm (1.89"-2")

Panel thickness range 5-10 mm (0.19"-0.39")