CELL300

- Designed for 60-63.5mm (2 3/8"-2 1/2") diameter tubes
- Precision extruded high tensile aluminium alloy
- DGUV17/BGV C1 rating
- Compatible with M950 / 4GS-91
- Mounting hole for up to 13mm (1/2") bolts
- Polished surface with laser markings
- Powder coated versions available on request
- Rated with SF 8:1 (kg) DGUV17/BGV C1 (SWL1)
- Rated with SF 4:1 (kg) 2006/42/EC (SWL2)
- Black anodized versions available

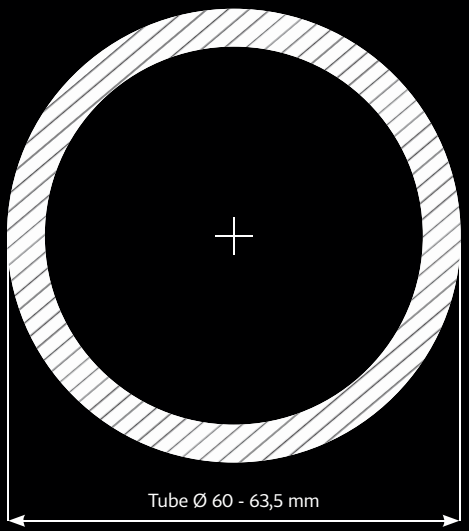

Cell 300 series

anodized

CELL301 / CELL301|anodized

Basic clamp

kg	lbs	SWL1	SWL2	Weight	Tube Ø
		650 (1433)	**1300** (2865)	**0.65** (1.43)	**60-63.5 mm** (2.36"-2.5")

Basic Clamp can be used for most applications.

anodized

CELL302 / CELL302|anodized

Clamp with bolt and wingnut

kg	lbs	SWL1	SWL2	Weight	Tube Ø
		650 (1433)	**1300** (2865)	**0.75** (1.65)	**60-63.5 mm** (2.36"-2.5")

Clamp supplied with M12 x 35 bolt and wingnut.

anodized

CELL303|650kg / CELL303|anodized

Clamp with lifting eye

kg	lbs	SWL1	SWL2	Weight	Tube Ø
		650 (1433)	**1300** (2865)	**1.00** (2.20)	**60-63.5 mm** (2.36"-2.5")

Clamp supplied with steel eye for attachment of rope or cable.
Version with SWL 340 kg (750 lbs) silver lifting eye (61 mm) available

anodized

CELL304 / CELL304|anodized

Swivel coupler

kg	lbs	SWL1	SWL2	Weight	Tube Ø
		650 (1433)	**1300** (2865)	**1.50** (3.30)	**60-63.5 mm** (2.36"-2.5")

Set of two clamps free to rotate 360° for connection of two tubes.

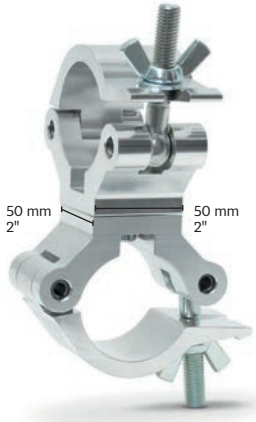

anodized

CELL305 / CELL305|anodized

90° fixed coupler

kg	lbs	SWL1	SWL2	Weight	Tube Ø
		650 (1433)	**1300** (2865)	**1.50** (3.30)	**60-63.5 mm** (2.36"-2.5")

Set of two clamps fixed at 90° to each other for connection of two tubes.

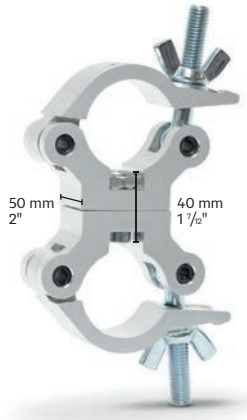

anodized

CELL306 / CELL306|anodized

Parallel coupler

kg	lbs	SWL1	SWL2	Weight	Tube Ø
		650 (1433)	**1300** (2865)	**1.50** (3.30)	**60-63.5 mm** (2.36"-2.5")

Set of two clamps fixed parallel to each other for connection of two tubes.

anodized

CELL307 / CELL307|anodized

Slim basic clamp

kg	lbs	SWL1	SWL2	Weight	Tube Ø
		650 (1433)	**1300** (2866)	**0.4** (0.88)	**60-63.5 mm** (2.36"-2.5")

Slim basic clamp can be used for most applications.

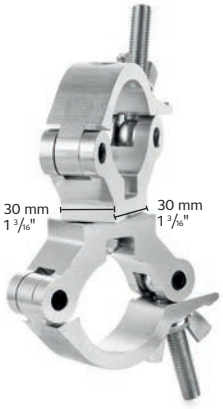

anodized

CELL314 / CELL314|anodized

Swivel coupler

kg	lbs	SWL1	SWL2	Weight	Tube Ø
		650 (1433)	**1300** (2866)	**0.81** (1.79)	**60-63.5 mm** (2.36"-2.5")

60-63.5mm Slim Swivel Coupler (CELL307 + CELL307 Assy)

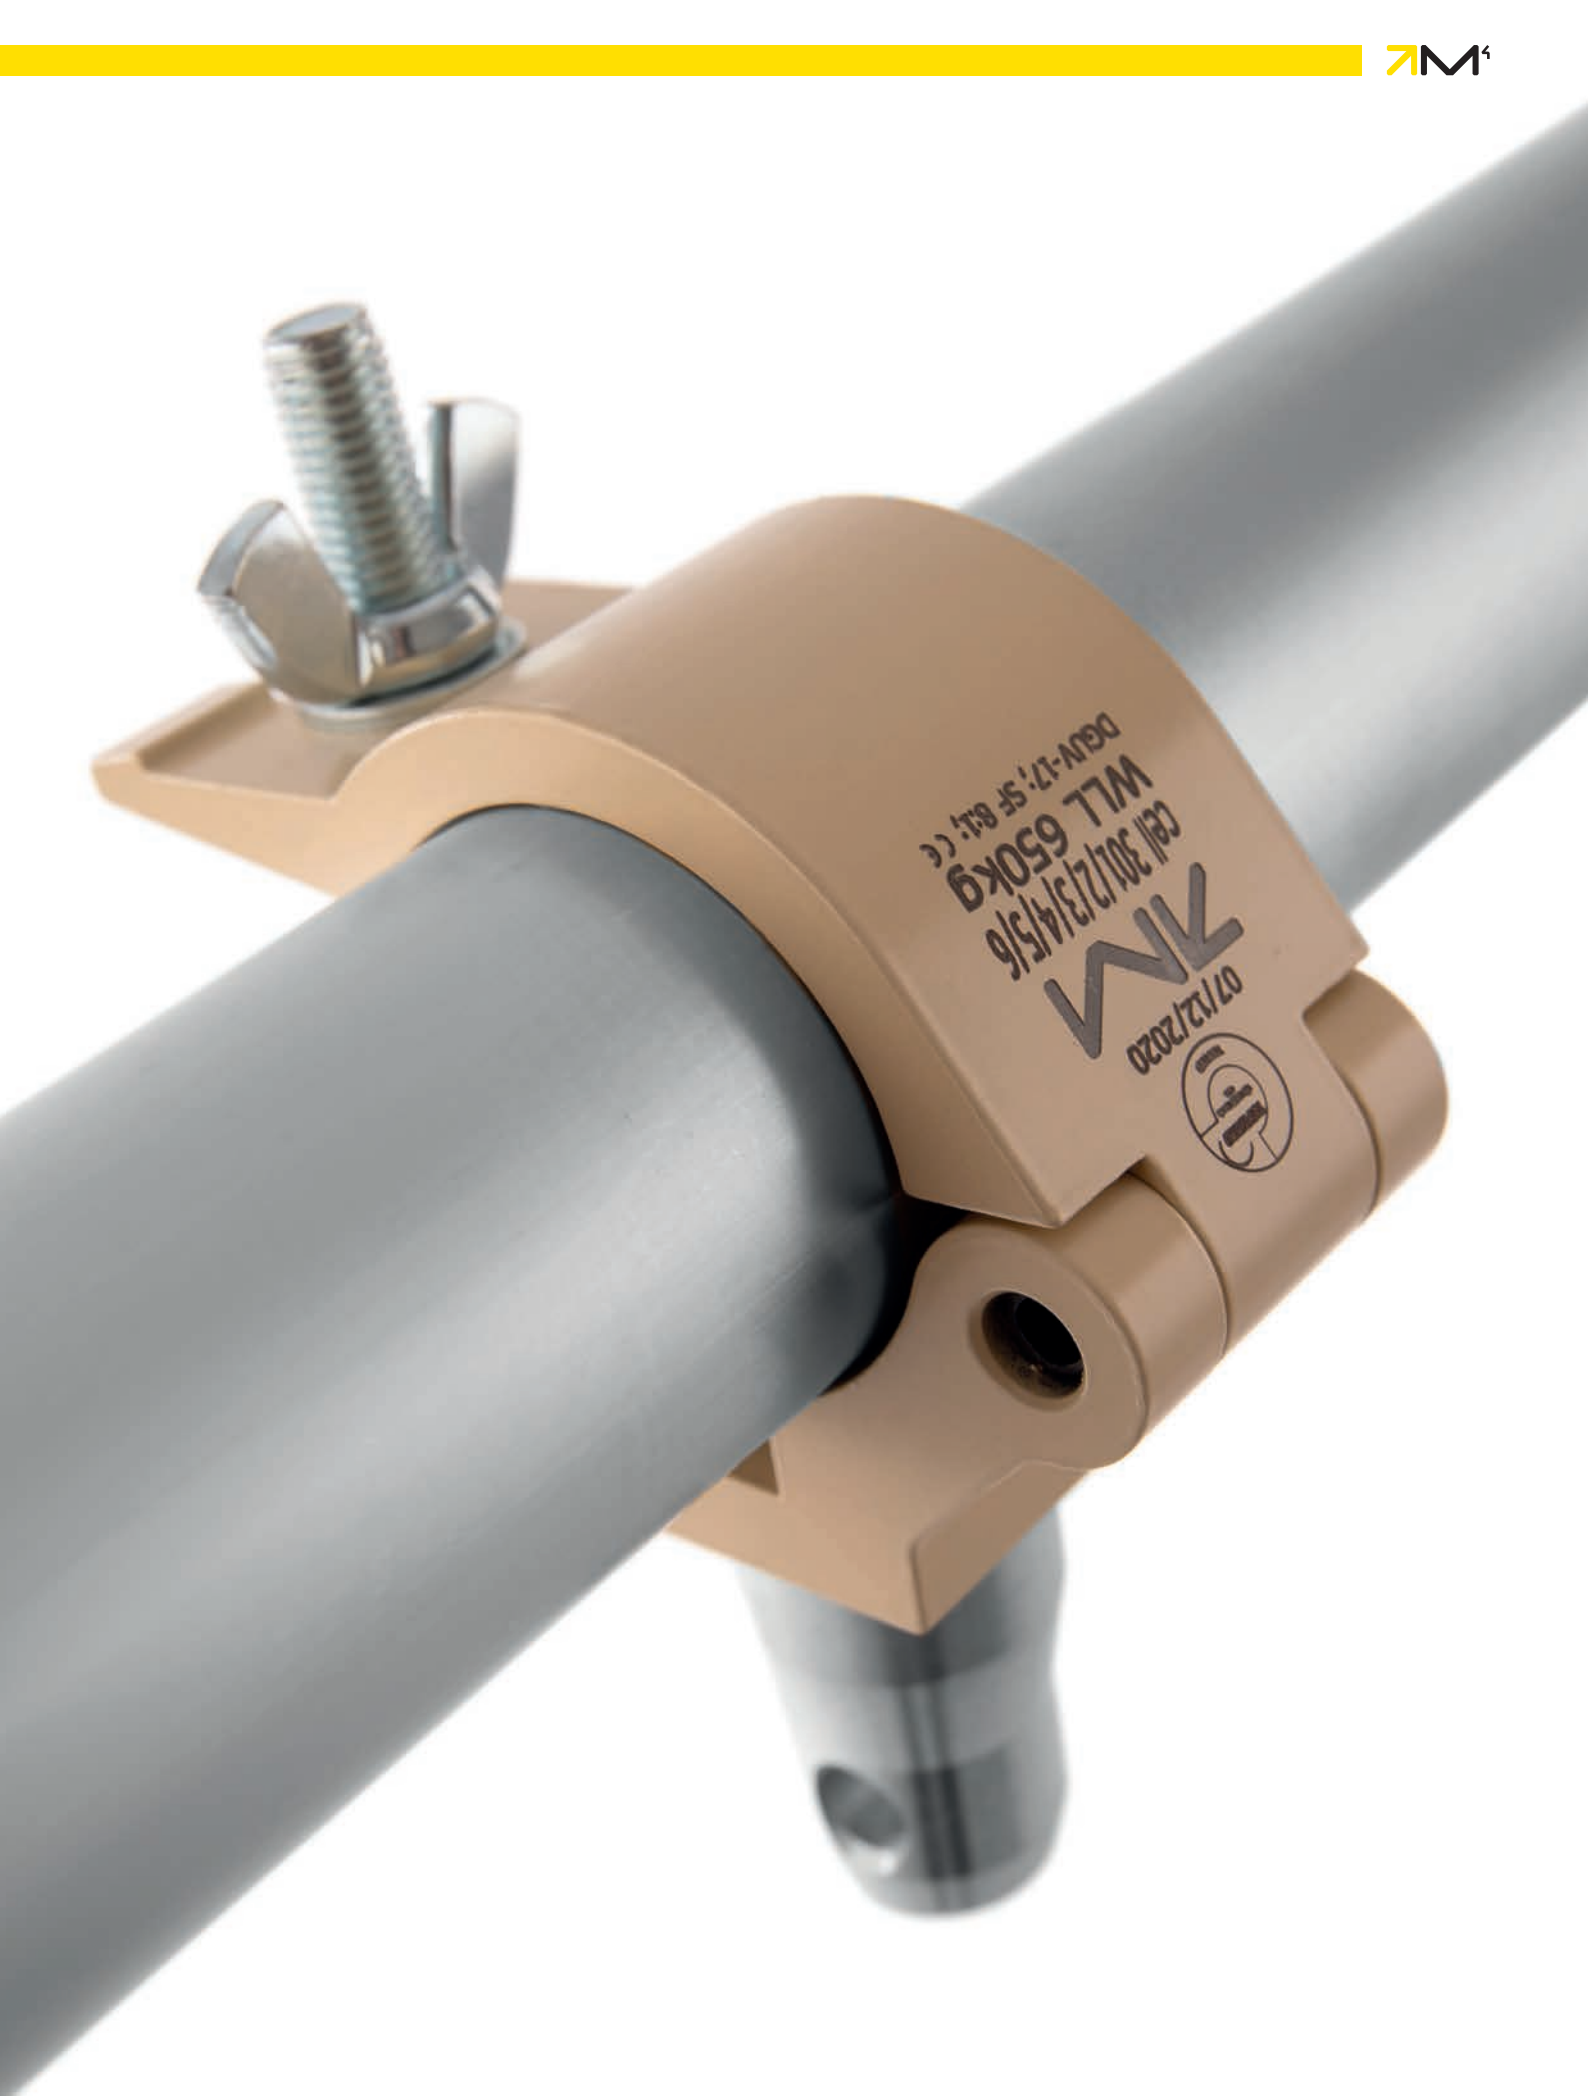
07/12/2020
CE// 301/2/3/4/5/6
WLL 650kg
DGUV-17; SF 8.1; CE